


NOTES:

1. 100% TESTING FOR OPENS, SHORTS CONTINUITY, MAX RESISTANCE OF 1Ω
2. COIL CABLE WITH A 10" O.D. AND TIE WITH A BEADED CABLE TIE
3. WRAP BREAKOUT WITH ELECTRICAL TAPE
4. INSTALL TWO LAYERS OF HEAT SHRINK OVER WIRES EXTENDING OUT OF DSUB OVERMOLD
5. INSTALL ONE LAYER OF HEAT SHRINK OVER WIRES EXTENDING OUT OF DSUB OVERMOLD

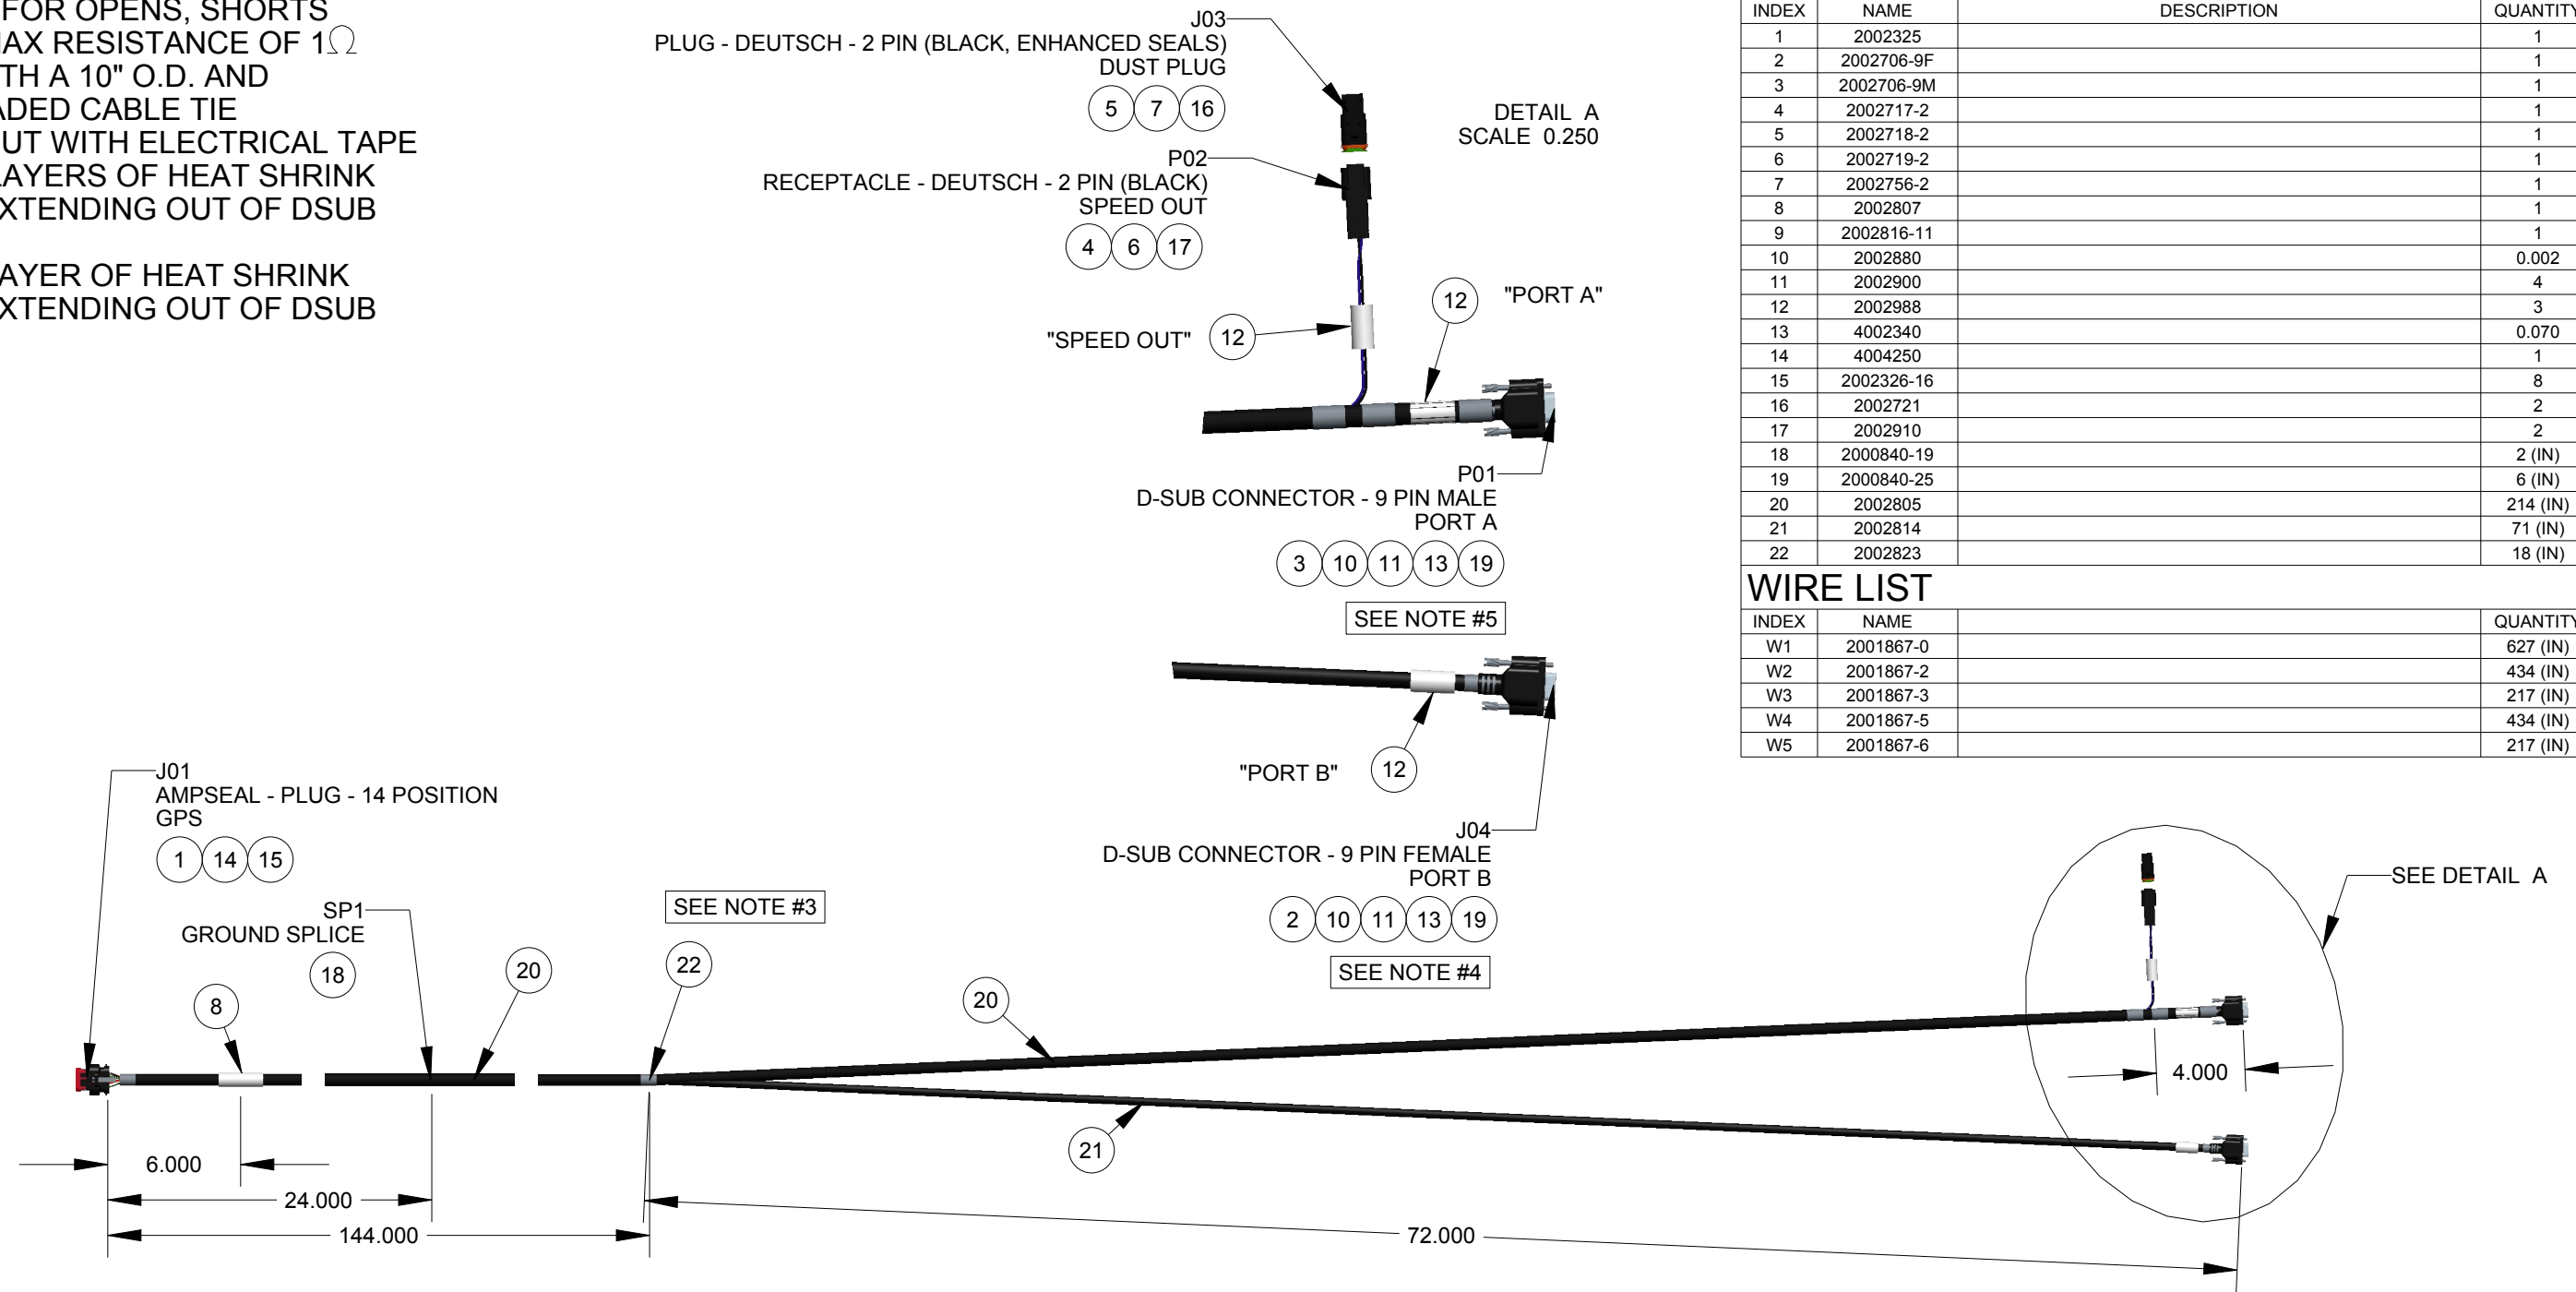

PARTS LIST

INDEX	NAME	DESCRIPTION	QUANTITY
1	2002325		1
2	2002706-9F		1
3	2002706-9M		1
4	2002717-2		1
5	2002718-2		1
6	2002719-2		1
7	2002756-2		1
8	2002807		1
9	2002816-11		1
10	2002880		0.002
11	2002900		4
12	2002988		3
13	4002340		0.070
14	4004250		1
15	2002326-16		8
16	2002721		2
17	2002910		2
18	2000840-19		2 (IN)
19	2000840-25		6 (IN)
20	2002805		214 (IN)
21	2002814		71 (IN)
22	2002823		18 (IN)

WIRE LIST

INDEX	NAME	QUANTITY
W1	2001867-0	627 (IN)
W2	2001867-2	434 (IN)
W3	2001867-3	217 (IN)
W4	2001867-5	434 (IN)
W5	2001867-6	217 (IN)

REV	LTR	CHANGES	BY	DATE	CHK
C		CORRECTING CKT CUT LENGTHS	JAC	3-18-15	JAB
B		ADDITION OF 4004250 RELEASE LATCH	JAC	1-6-15	LJL
A		NEW DRAWING	LJL	5-6-14	JAB

THE INFORMATION HEREON IS PROPRIETARY PROPERTY OF AG LEADER TECHNOLOGY, INC. THIS DOCUMENT IS A CONFIDENTIAL DISCLOSURE. ANY USE, EXCEPT THAT FOR WHICH IT IS LOANED, IS PROHIBITED.

DIMS SHOWN ARE WIRE LENGTHS UNLESS OTHERWISE NOTED
 $\pm 0.125"$ TOLERANCE ON JACKET STRIP DIMS
 $\pm 0.031"$ TOLERANCE ON WIRE STRIP LENGTHS
 LENGTH TOLERANCES ARE NON-STACKABLE

OVERALL LENGTH	LENGTH TOLERANCE
00.00" - 11.99"	$\pm 0.25"$
12.00" - 59.99"	$\pm 0.50"$
60.00" - 119.99"	$\pm 1.00"$
120.00" & UP	$\pm 2.00"$

LABEL POSITION DIMS ARE $\pm 2.00"$ UNLESS OTHERWISE NOTED

COMPLIANCE: ROHS

SCALE: 0.125 FORMAT SIZE: B SHEET: 1 OF 2

Ag Leader[®] Technology

2202 SOUTH RIVERSIDE DR. AMES, IA 50010

MATERIAL:

SEE NOTES

FINISH: NONE

PART NOUN - DESCRIPTION: CABLE GPS 6000/6500 DUAL PORT

PART NO: 4004175-18 REV: C

